




Coeus

The Coeus clean room fixture is IP65 rated both front and rear and is suited to most classes of clean room. It features front and rear access and is designed for installation in cut aperture ceilings. Additionally, the Coeus features a detachable gear tray. Available in LED or T5 formats.

An optional walk on version is available; tested to take a minimum single point load of 0.9kg as per BS6399 part 1.

Colour:	White.
LED:	700X600: 60w. 5375lm. 1300x600: 117w. 10,750lm.
Lamp Wattage:	700X600: 3x13w T5, 4x13w T5 or 4x20w T5. 1300x600: 3x25w T5, 3x50w T5, 4x25w T5 or 4x50w T5.
Construction:	Steel.
Walk On:	>0.9kg single load point, as per BS6399 part 1.
IP Rating:	IP65 Front and Rear.
Driver:	Electronic/DALI Ballast.

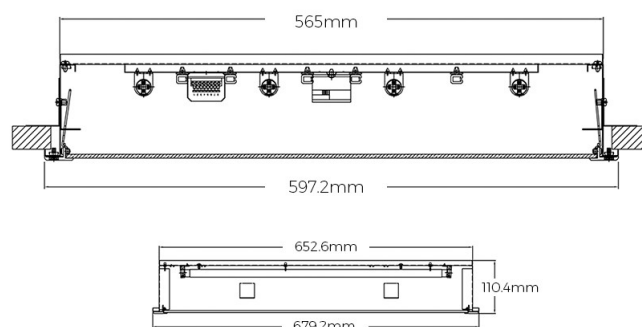

To specify choose one entry from each column below, e.g. "COE 076 WO EMD 413 WH" (option columns may be omitted if not required)

Name	Feature	Option	Emergency Option	Output (w.)	Trim
COE (Coeus)	076 (700X600) 136 (1300x600)	WO (Walk On)	EM EMS (Self Test) EMD (DALI)	L060: 60w. LED (700X600) L117: 117w. LED (1300x600) 313: 3x13w T5 (700X600) 413: 4x13w T5 (700X600) 420: 4x20w T5 (700X600) 325: 3x25w T5 (1300x600) 350: 3x50w T5 (1300x600) 425: 4x25w T5 (1300x600) 450: 4x50w T5 (1300x600)	WH (White)